

Hole Ranges

90 – 115 mm

Engine Power

62.5 kW

Rotation Torque

3,000 N·m

Drill Type

Down-the-hole

Applications

Mining and quarrying

DH45A-H
DTH DRILL RIG



TOUGH WORLD. TOUGH EQUIPMENT.

DESIGNED TO MAKE TOUGH WORK EASY ON THE OPERATOR

1 FLOATING PIPE AND HOSE

Special designed floating pipe and hose reel protects the hydraulics and air pipes and hoses, achieving a stable output of hydraulic energy and a longer service life of the oil lines.

2 DUST COLLECTOR SYSTEM

Standard two-stage (cyclone and laminar flow) dust collector system with large filtration area provides outstanding performance and effectively protect the environment and the health of operators.

3 TRAMMING SYSTEM

Compact undercarriage with heavy-duty speed reduction mechanism possesses good cross terrain capability.

Track oscillation function gives both tracks maximum ground grasping. ±13 degree track oscillation makes machine more stable when climbing up and down slopes.

4 FEED BEAM AND BOOM

Heavy duty box design feed beam, arm, bracket and boom resists and absorbs sudden force impact.

30 degree incline angle of beam facilitates your operator to observe drill hole and improves the work accuracy.

5 CONTROL SYSTEM

The unique control system offers the following advantage for the operator: auto adjustment of working parameters, e.g. feed rate and pressure, rotation torque and impact pressure to ensure the drill always working at its best condition, and reduce the failures such as jamming.

6 MAINTENANCE

An emergency towing system is achieved by the travel motor with built-in clutch.

Utilization of high precision filter elements ensures the cleanliness of hydraulics and extends service life time of the hydraulic components.

Engine filters are installed on the same side for easy maintenance.



RECOMMENDED AIR COMPRESSOR

MODEL CS191A-17MD

AIR PRESSURE 1.7 MPa
VOLUME FLOW 16 m³/min



SPECIFICATIONS


FUNCTIONAL SPEC	DH45A-H
Hole ranges	90-115 mm
Drill pipe length	3,000 mm
Drill pipe diameter	64/76 mm
Hammer size	4" / 5"
Rotation speed	0 - 100 rpm
Rotation torque	3,000 N·m

FUNCTION OF BOOM	
Travel length	3,200 mm
Feed extension	1,260 mm
Feed rate, max.	0.6 M/s
Feed lift capacity, max.	12 kN
Pull out capacity, max.	18 kN
Length of feed beam	5,060 mm

UNDERCARRIAGE	
Tramming speed	3.0 km/h
Track oscillation	±10°
Ground Clearance	350 mm
Max. gradeability	35°

DIESEL ENGINE	
Rated power	62.5 kW
Manufacturer	Yuchai

TRANSPORT DATA	
Length	6,300 mm
Width	2,200 mm
Height	2,600 mm
Weight	5,800 kg

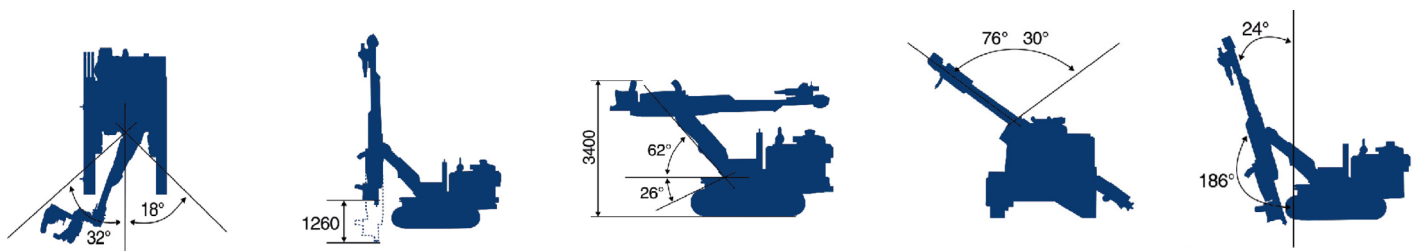

1. Swing angle of drill arm 2. Carriage compensation 3. Drill arm pitch angle 4. Sliding angle of the carriage 5. Carriage pitch angle



Guangxi LiuGong Machinery Co., Ltd.
 No. 1 Liutai Road, Liuzhou, Guangxi, PR China 545007
 T: +86 772 388 6124 E: overseas@liugong.com
 www.liugong.com

LG-PB-DH45A-H-WW-A4-25052019-ENG

Like and follow us:



The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options varies by regional availability.